

move 'n shoot

film & photo camera rig systems

www.move-n-shoot.com

FG2

The **FG2** is a combined rig construction. It can be used for the production of motion pictures (**F2**) and also enables the use of the glass truss for still photography (**G2**).


Specifications setup time ▶ 1 - 1,5 hours

motion pictures



The **F2** (for motion pictures) can be mounted from front/rear/side.

camera movement after setup
▶ 230° horizontal / 105° vertical

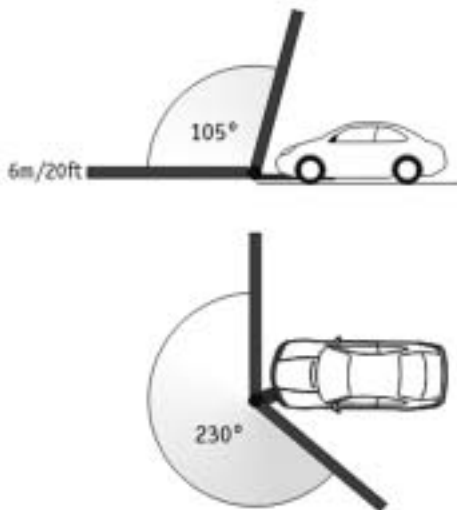


length	pay-load	camera head		camera weight
		L500	L250	
2 m	60 kg	-14 kg		46 kg
4 m	40 kg	-14 kg		26 kg
6 m	20 kg		-7 kg	13 kg
8 m	15 kg		-7 kg	8 kg

still photography



The **G2** (for still photography) can be mounted from side only. The **G2** is a glass truss rig which has been designed to minimize retouching in still photography.

camera movement after setup
▶ 120° horizontal / 100° vertical
max. length without glass truss
▶ 13 metres

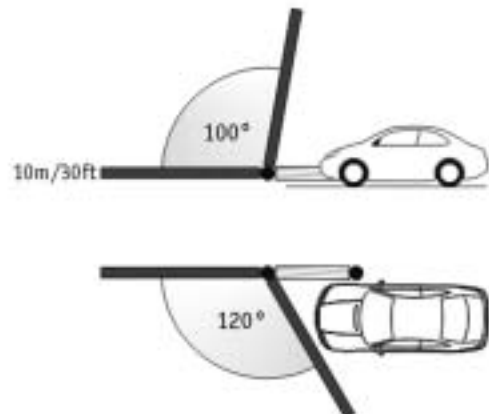

length	camera weight
2 m	40 kg
4 m	25 kg
6 m	17 kg
8 m	13 kg
10 m	10 kg